

NOBLELIFT FRANCE



ND530

SELF-PROPELLED WALK-BEHIND SCRUBBER



Robust
design



High
performance



Easy
maintenance

Pourquoi choisir entre le prix et la qualité quand on peut avoir les deux !

www.noblelift.fr

ND530 - PRODUCT OVERVIEW

// Overview

The ND530 walk-behind scrubber dryer offers fast, efficient and cost-effective cleaning. This productive machine combines excellent value for money with operator comfort (forward and reverse drive motor).

// Features and benefits

The removable dirty water collection tank allows for easy cleaning with quick access.

The intuitive control panel offers simple and reliable operation for the user.

Quick and easy water filling with direct access.

The brush plate and floor nozzle are made of die-cast aluminium and painted. They are extremely robust and completely corrosion-resistant.

The adjustable brush pressure easily adapts to different floor types and cleaning needs.

The mechanical noise reduction system ensures quiet operation, ideal for sensitive environments day and night (hospitals, nursing homes, high schools, etc.).

The integrated anti-foam system and full tank alarm effectively protect the suction motor and extend its service life.

The long-lasting traction motor ensures smooth, effortless and comfortable propulsion, reducing operator fatigue.

The ND530 is equipped with an intuitive control button for simplified operation.

// Key benefits

- Extended battery life: high battery capacity for long, uninterrupted operation.
- Maximum reliability: premium components and robust design.
- Simplified maintenance: quick access to tanks and maintenance components.
- Reduced labour costs: increased productivity and faster cleaning.
- Enhanced safety: simple and intuitive controls, optimal visibility and protected electrical system.



ND530 - PRODUCT FEATURES



Die-cast aluminium brush deck and floor inlet, robust, durable and corrosion-resistant.



Long-lasting traction motor for smooth, effortless propulsion and optimal comfort (integrated forward and reverse modes)



Intuitive touch control for reliable, simple operation and low maintenance costs.



Integrated anti-foam system and full tank alarm to protect the suction motor and extend its service life.



Wide-opening collection tank with removable design for quick and easy maintenance.



External charging port for quick and secure battery connection.



Simple, quick and splash-free access to water refill.

Easy assembly and disassembly of the automatic brush, with optimal durability over time.




| Technical Specifications | | | | |
|--------------------------|--------------------------------------|----------------|-----------------|-----------------|
| 1 | Model | | ND530 | ND530-ION24-100 |
| 2 | Machine height | mm | 1050 | 1050 |
| 3 | Solution tank capacity | L | 50 | 50 |
| 4 | Recovery tank capacity | L | 50 | 50 |
| 5 | Min/max brush pressure | kg | 20.5 / 27.8 | 20.5 / 27.8 |
| 6 | Front wheel diameter | mm | 200 | 200 |
| 7 | Rear wheel diameter | mm | 100 | 100 |
| 8 | Suction motor power | W | 400 | 400 |
| 9 | Classification suitability | % | 2 | 2 |
| 10 | Sound pressure level | dB(A) | 65.8±3dB | 65.8±3dB |
| 11 | Battery type | | AGM | Lithium |
| 12 | Battery | V/Ah | 2x12/100 | 24/100 |
| 13 | Battery compartment size (LxWxH) | mm | 350 x 350 x 300 | 350 x 350 x 300 |
| 14 | Vacuum capacity | Kpa | >11 | >11 |
| 15 | Width of the washing area | mm | 50 | 50 |
| 16 | Width of floor inlet | mm | 840 | 840 |
| 17 | Maximum length | mm | 1250 | 1250 |
| 18 | Machine width (without floor nozzle) | mm | 550 | 550 |
| 19 | Brush diameter | mm | 530 | 530 |
| 20 | Floor area | m ² | 0.58 | 0.58 |
| 21 | Travel speed | km/h | 0.6 | 0.6 |
| 22 | Net weight (without batteries) | kg | 100 | 100 |
| 23 | Battery weight | kg | 2x32 | 29 |
| 24 | Nominal power of brush motor | W | 550 | 550 |
| 25 | Brush rotation speed | rpm | 180 | 180 |

// Sectors of activity



// Compatible soil types

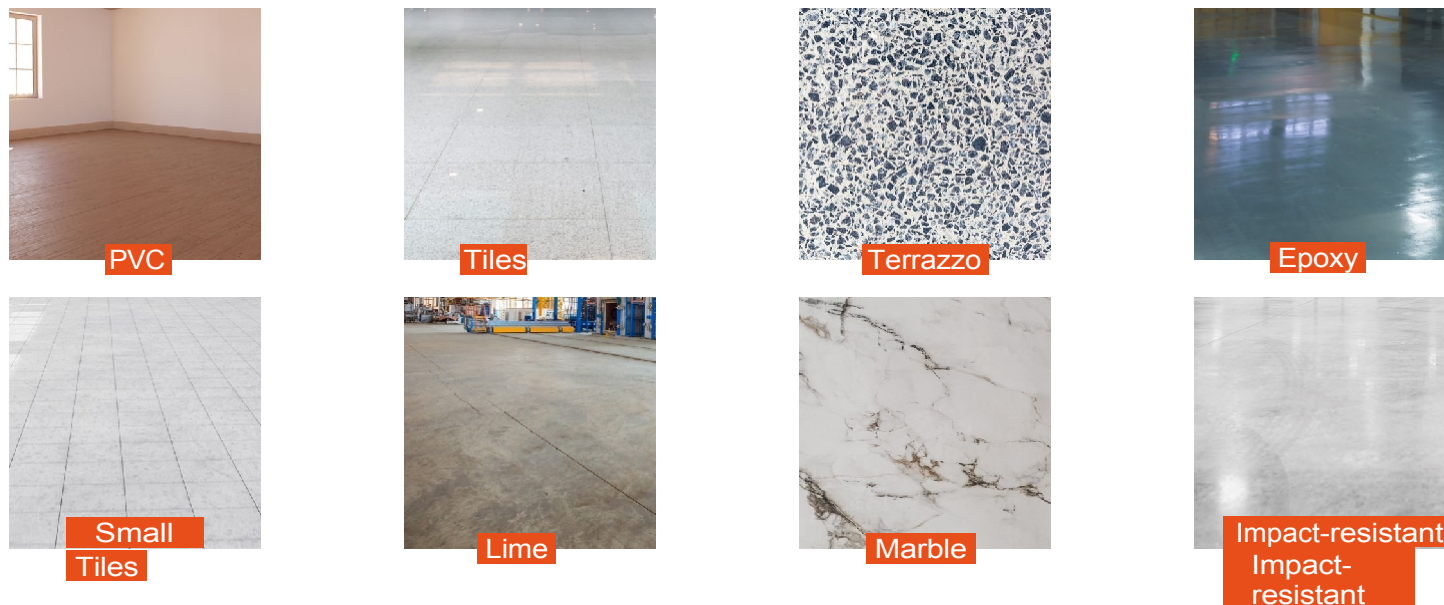



NOBLELIFT

FRANCE

HEAD OFFICE

562 rue Sud Landes
Sud Landes Business Park
40 300 HASTINGUES

Tel: 05 40 07 89 71

Email: contact@noblelift.fr

www.noblelift.fr



NOBLELIFT FRANCE