

Product features and advantages:

- NR860 is a middle and large front-wheel drive scrubber with dual brushes.
- The garbage storage box in the recovery tank can effectively filter large garbage to avoid the blockage of the drain pipe.
- The whole vehicle adopts modular and compact design, which brings good maneuverability and flexibility.
- The low center of gravity water tank and battery design ensure the whole vehicle higher driving safety and maintenance convenience.
- Integrated waterproof touch panel design, easy for operations such as driving speed control, water flow adjustment, brush lifting/lowering.
- Large-size color LCD screen to achieve equipment parameters visible, convenient for fault diagnosis and maintenance.
- Standard electronic water level indicator for solution/recovery tanks, making level display intuitive and convenient. The recovery tank will automatically alarm and stop when it is full.
- The whole vehicle is equipped with one-button soft start of motor, over-current and under-voltage protection of controller.
- Patented disk brush adopts buckle design, achieving automatic loading and unloading of disk brush with one key.
- One touch ECO model to reduce the energy consumption and noise level, suitable for low noise request scenarios.
- 36V200Ah maintenance-free lead-acid battery ensures to work continuously for 5-6 hours on one charge.



**Save Labor and money,
for users to save a lot of
labor costs.**



NOBLELIFT

www.noblelift.com

NR860

Ride-on Scrubber



NEW *Noblelift Products*
ARRIVAL

NOBLELIFT CHINA

Add:528 Changzhou Road,Taihu Sub-district,
Changxing, Zhejiang 313100 China
Tel:86-572-6210817 6210311
Fax:86-572-6210777 6128612
Email:info@noblelift.com
Http:www.noblelift.com www.noblelift.cn



Official website



Our Wechat

NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD



High performance battery
Large capacity maintenance-free lead-acid battery, safe and reliable, long working time.



Control panel
Integrated waterproof touch panel design, easy and fast operation.




Steering wheel
With steering wheel booster ball, comfortable to operate.



Charging port
External charging port, easy to charge.



Hatchback recovery tank
Tool-free disassembly design, easy to clean and maintain.



Hygroscopic squeegee
Wear-resistant adhesive strip arc suction and scrape-shaped design, easy to absorb water without residue.



Water injection port and water level indicator
Display clear water tank water level, large opening water injection port, easy to add clear water.



High-power non-slip front drive wheel
High-power anti-slip drive front wheel, ramp operation will not slope, more safe.

The recommended application of brush/ needle disc for fixing pad:

	Brush			Needle disc+pad		
	Soft brush	Nylon (Standard)	Hard brush	White	Red	Black
Concrete floor		Applicable	Applicable		Applicable	Applicable
Terrazzo floor		Applicable	Applicable		Applicable	Applicable
Tile/ Slate floor	Applicable	Applicable			Applicable	
Marble floor	Applicable	Applicable		Applicable	Applicable	
Plastic floor	Applicable			Applicable	Applicable	
Rubber floor	Applicable			Applicable		

Notes:

1. Soft brush: for cleaning and polishing smooth surface
2. Nylon brush: for general floor cleaning (standard configuration)
3. Hard brush: for removing stubborn dirt on hard ground
4. Needle disc: holding the pad, reducing the wear on the floor; the pad is used together with the needle disc. According to different conditions of the floor, we need to choose different pads in different colors (generally the deeper the color is, the greater the friction on the floor).

Specific application of pads:

- a) White pad: for general cleaning and polishing, marble and smooth floors
- b) Red pad: for general floor cleaning
- c) Black pad: for removing stubborn stains on hard floors


The application of squeezer rubber strip:

	Rubber (Standard)	(PU)
Concrete floor	Applicable	Applicable
Terrazzo floor	Applicable	Applicable
Tile/ Slate floor	Applicable	
Marble floor	Applicable	
Plastic floor	Applicable	Applicable
Rubber floor	Applicable	Applicable


Note:

Polyurethane (PU) strip has strong wear resistance and oil resistance, which is suitable for oil floor conditions, but cutting and tearing performance of PU strip is poor, so it is not suitable for quadrel/ brick or tile floors.

Industries

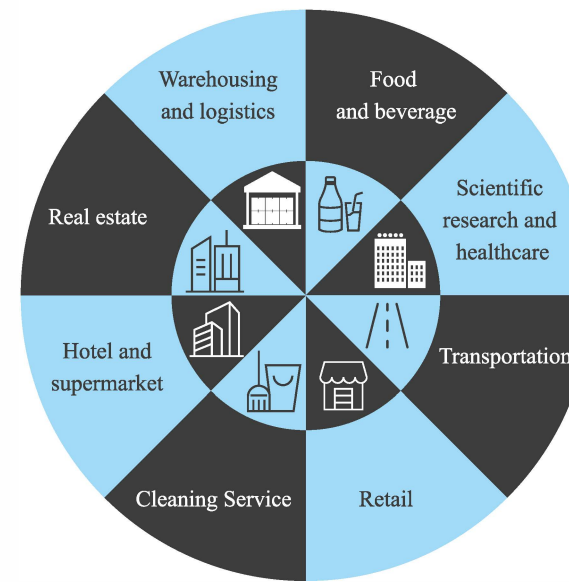

Scenarios

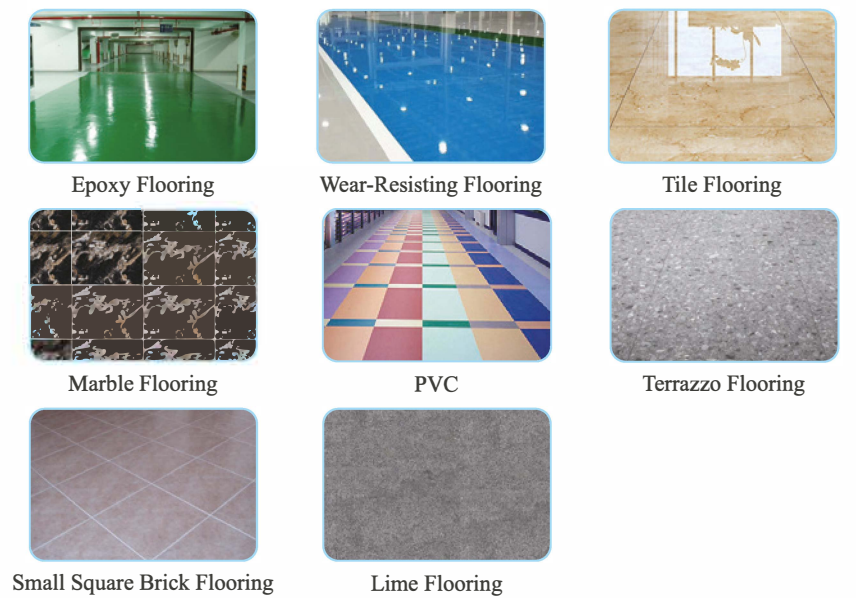

NR1060 Ride-on Scrubber--Specifications					
TECHNICAL DATA	Model			NR860	
	Cleaning width	mm	in	860	33.8
Brush/pad diameter	mm	in	2×430	2×16.9	
Solution tank capacity	L	gal	200	52.8	
Recovery tank capacity	L	gal	210	55.5	
Clean productivity	m ² /h	yd ² /h	5590	6685	
Continuous working time	h	h	5~6	5~6	
Brush motor rated power	W	Hp	2×550	2×0.74	
Vacuum motor rated power	W	Hp	600	0.8	
Drive motor rated power	W	Hp	800	1.1	
Traveling speed	km/h	mph	0~6.5	0~4	
Sound level dB	A	A	68±3	68±3	
Battery			36V (6×6V200Ah)	36V (6×6V200Ah)	
Net weight (without batteries)	kg	lbs	475	1047	
Product dimensions	mm	in	1800×910×1350	70.9×33.8×53.1	